




IMT-PRO Profiling Attachment IP560S For Granite

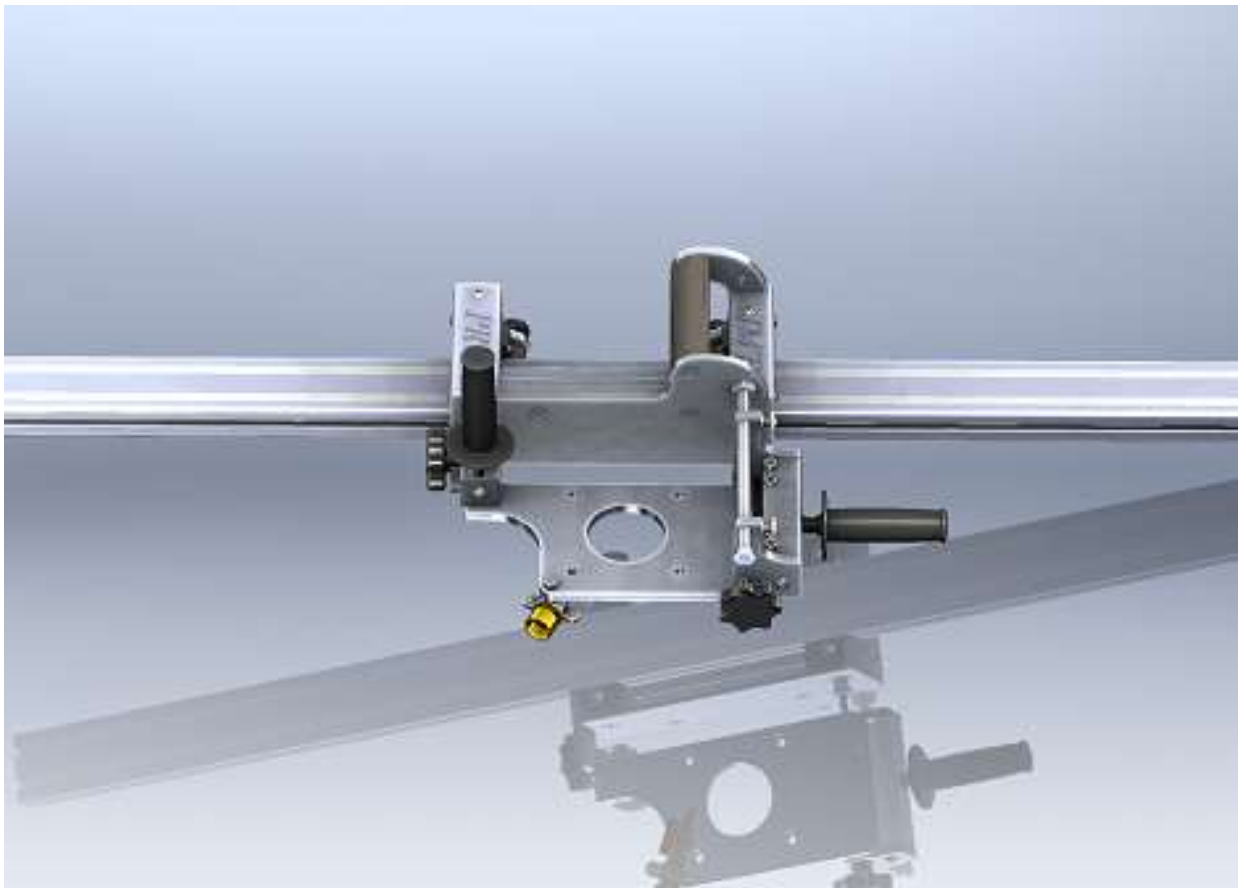

IMT PRO EDGE is to be used with IMT PRO carriage only (sold separately)

Power tool for use with IMT PRO EDGE is to be supplied by the owner (shown for reference only)

GFCI power cord for use with power router tool is to be supplied by the owner

The owner of the power tool takes full responsibility for set up, operation and safety of the power tool

General Power Tool Safety

Warnings

Please read all safety warnings and all instructions.

Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury. Save all warnings and instructions for future reference.

The term "power tool" in the warnings refers to your (corded) power tool.

Work area safety

1. Keep work area clean and well lit. Cluttered or dark areas invite accidents.
2. Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust. Power tools create sparks which may ignite the dust or fumes.
3. Keep children and bystanders away while operating a power tool. Distractions can cause you to lose control.

Electrical Safety

4. Always use GFCI power cord. Power tool (GFCI) protected plug must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools. Unmodified plug and matching outlets will reduce risk of electric shock.
5. **Avoid body contact with earthed or grounded surfaces. There is an increased risk of electric shock if your body is earthed or grounded.**
6. **Always wear rubber gloves when handling the power tool. Failure to wear protective gloves when the power tool is connected to the power source will increase the risk of electric shock.**

7. Do not expose power tool to rain or wet conditions. Water entering a power tool will increase the risk of electric shock. Direct the water to the blade only. The motor must remain dry at all times.

8. Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts. Damaged or entangled cords increase the risk of electric shock.

9. When operating a power tool outdoors, use an extension cord suitable for outdoor use. Use of a cord suitable for outdoor use reduces the risk of electric shock.

10. Always use a ground fault circuit interrupter (GFCI) protected supply. Use of a GFCI reduces the risk of electric shock.

Personal Safety

11. Stay alert, watch what you are doing, and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication. A moment of inattention while operating power tools may result in serious personal injury.

12. Use personal protective equipment. **Always wear eye protection. Protective equipment such as dust mask, non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions will reduce personal injuries.**

13. Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source, picking up or carrying the tool. Carrying power tools with your finger on the switch or energizing power tool that have the switch on invites accidents.

14. Remove any adjusting key or wrench before turning the power tool on. A wrench or a key left attached to a rotating part of the power tool may result in personal injury.

15. Do not overreach. Keep proper footing and balance at all times. This enables better control of the power tool in unexpected situations.

16. Dress properly. Do not wear loose clothing or jewelry. Keep your hair, clothing, and gloves away from moving parts. Loose clothes, jewelry or long hair can be caught in moving parts.

17. If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used.

Use of dust collection can reduce dust-related hazards.

Power tool use and care

18. Do not force the power tool.

19. Do not use the power tool if the switch does not turn it on and off. Any power tool that cannot be controlled with the switch is dangerous and must be repaired.

20. Disconnect the plug from the power source from the power tool before making any adjustments, changing accessories, or storing power tools. Such preventive safety measures reduce the risk of starting the power tool accidentally.

21. Store idle power tools out of the reach of children and do not allow individuals unfamiliar with the power tool or these instructions to operate the power tool. Power tools are dangerous in the hands of untrained users.

22. Maintain power tool. Check for misalign mentor binding of moving parts, breakage of parts, and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use. Many accidents are caused by poorly maintained power tools.

23. Keep cutting tools sharp and clean. Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.

24. Use the power tool, accessories, etc. in accordance with these instructions, taking into account the working conditions and the work to be performed. Use of the power tool for operations different from those intended could result in a hazardous situation.

SERVICE

24. Have your power tool serviced by a qualified repair person using only identical replacement parts. This will ensure that the safety of the power tool is maintained.

25. Follow instruction for lubricating and changing accessories.

26. Keep handles dry, clean, and free from oil and grease.


USE PROPER EXTENSION CORD. Make sure your extension cord is in good condition. When using an extension cord, be sure to use one heavy enough to carry the current the power tool will draw. An undersized cord will cause a drop in line voltage resulting in loss of power and overheating. Use 14 AWG extension cord for up to 25ft and 12 AWG cord for up to 50ft. Using extension cord longer than 50ft is not recommended. The smaller the gage number, the heavier the cord.

SPECIFIC SAFETY RULES


DO NOT let comfort or familiarity with product (gained from repeated use) replace strict adherence to power saw safety rules. If you use this tool unsafely or incorrectly, you can suffer serious personal injury.


DANGER:

1. Keep hands away from routing area and the blade. Keep your second hand on grip handle at all times. If both hands are holding handles on the attachment, they cannot be cut by the blade.
2. Secure the material to be cut to stable platform. It is important to support the work properly to minimize body exposure, blade binding, or loss of control.
3. **Wear rubber gloves at all times when operating power tool.** When in operation the cutting tool may contact its own cord. Contact with a "live" wire will also make exposed metal parts of the power tool "live" and shock the operator.
 - Do not use dull or damaged cutting or polishing tools.
4. **There is no lower guard to protect the operator from the blade. Take extra precaution when power tool is in operation. Be aware of the time it takes for the blade to stop after switch is released.**
5. ALWAYS hold the tool firmly with both hands. NEVER place your hand or fingers below the attachment. If kickback occurs, the router could easily slide backwards, leading to serious personal injury.

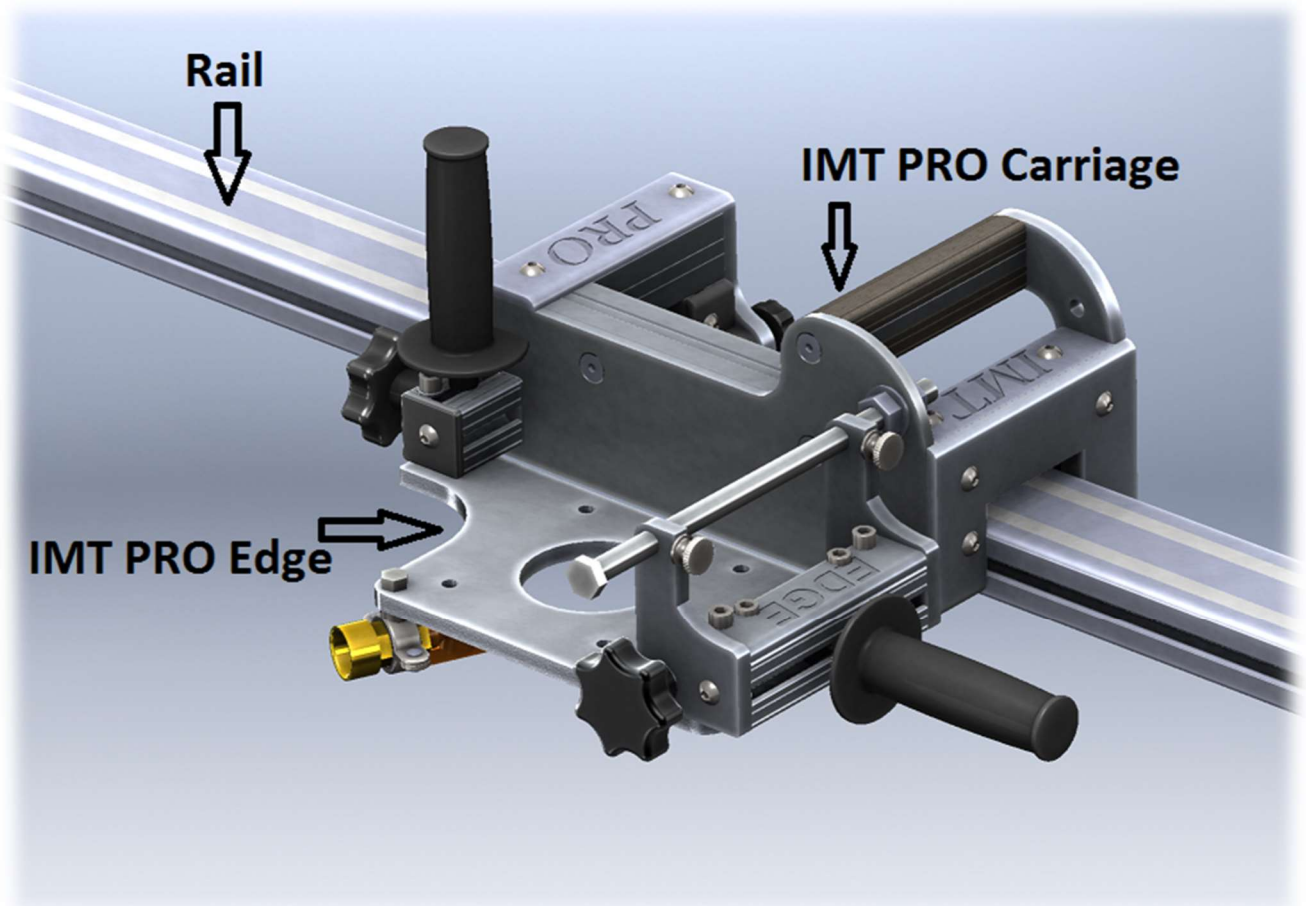

IMT PRO EDGE with Owner Supplied Router Motor

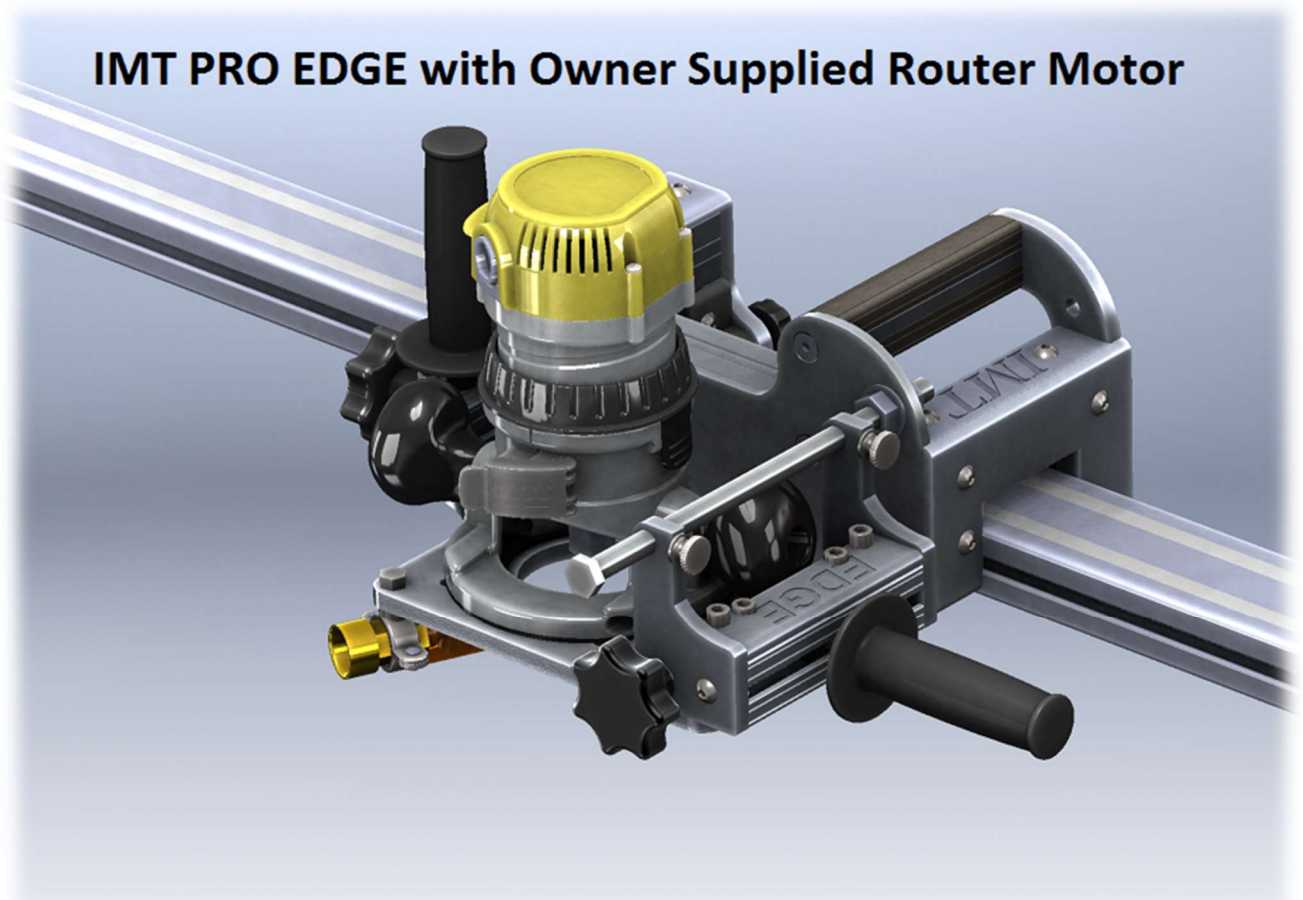


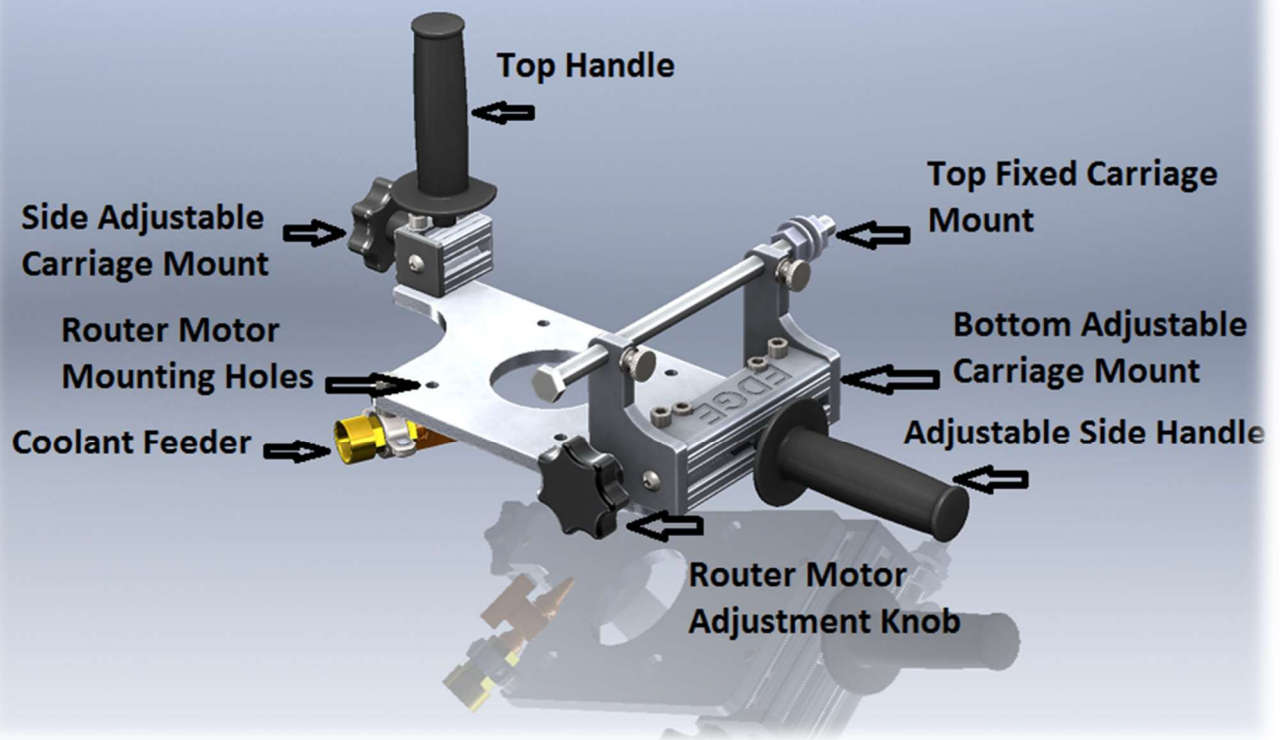


Router Motor Installation



IMT PRO EDGE installation

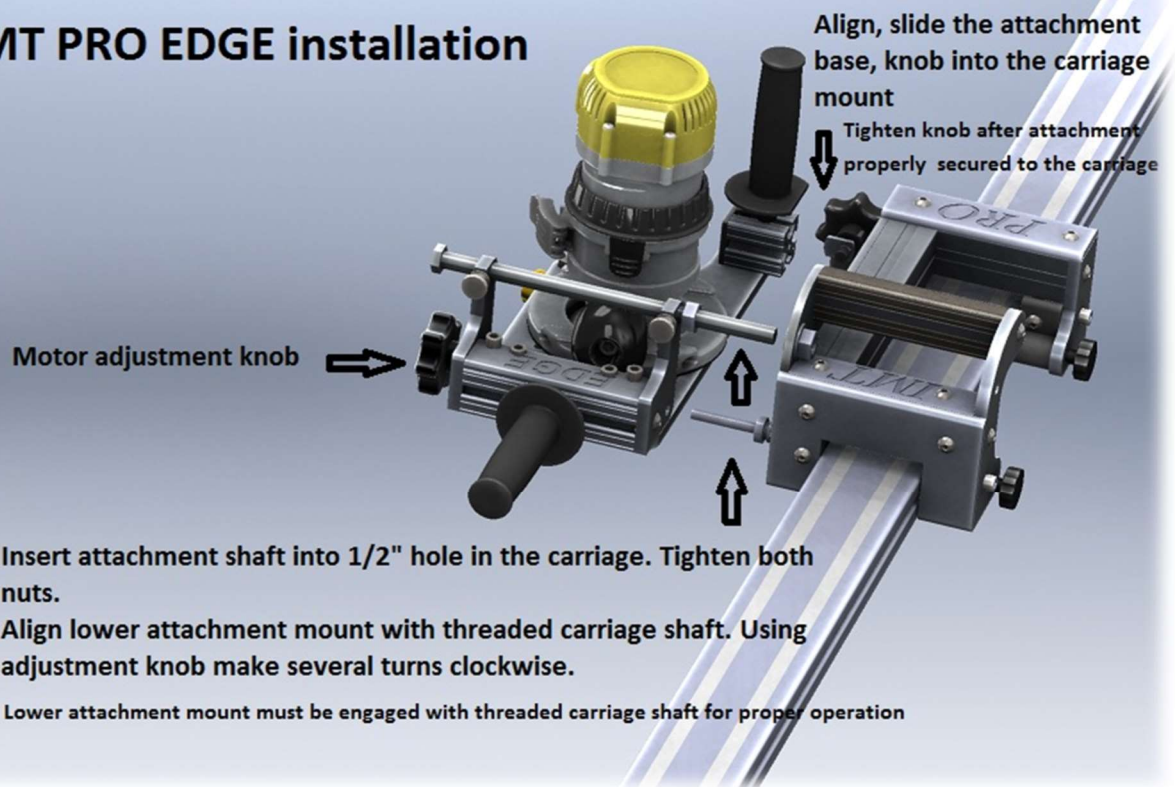


IMT PRO EDGE Operation

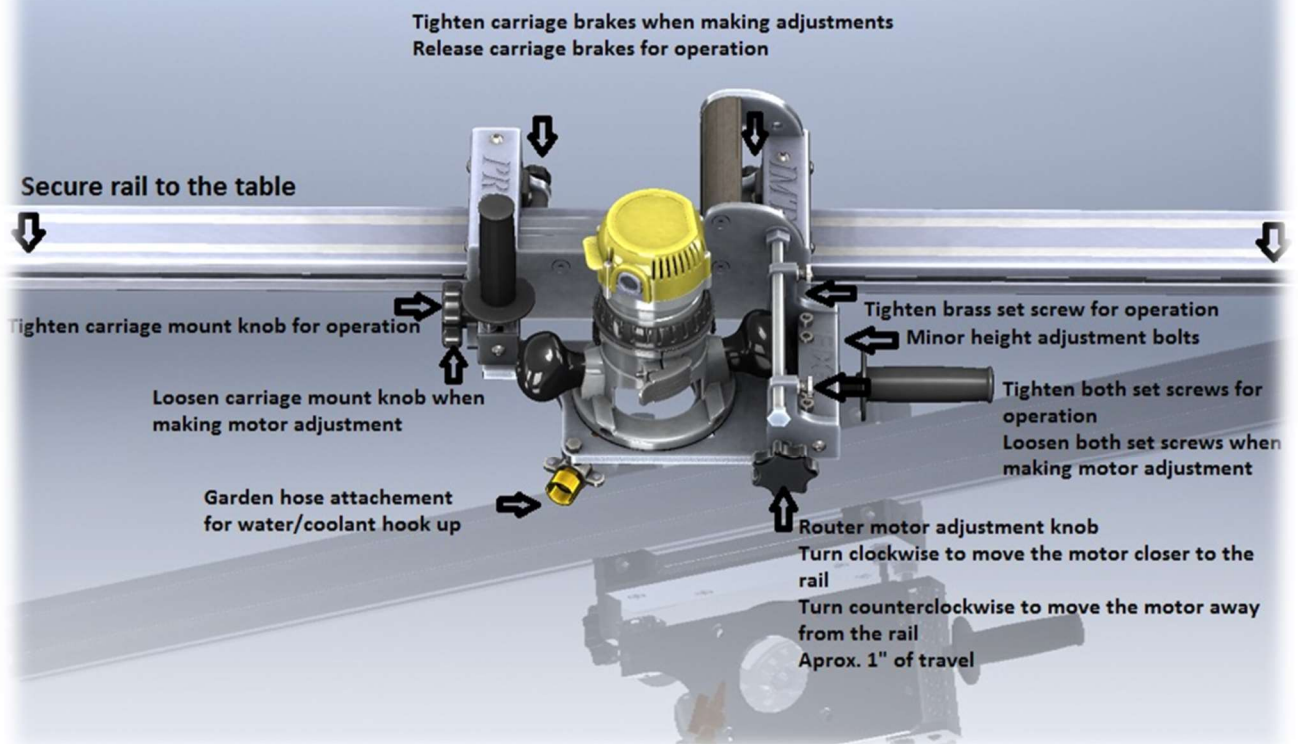

IMT PRO EDGE Maintenance & Storage

Keep the attachment clean, free from stone powder deposit
All threads, shafts, bolts, screws must be lubricated with machine oil
after each use

Detach IMT PRO EDGE from the carriage when not in use

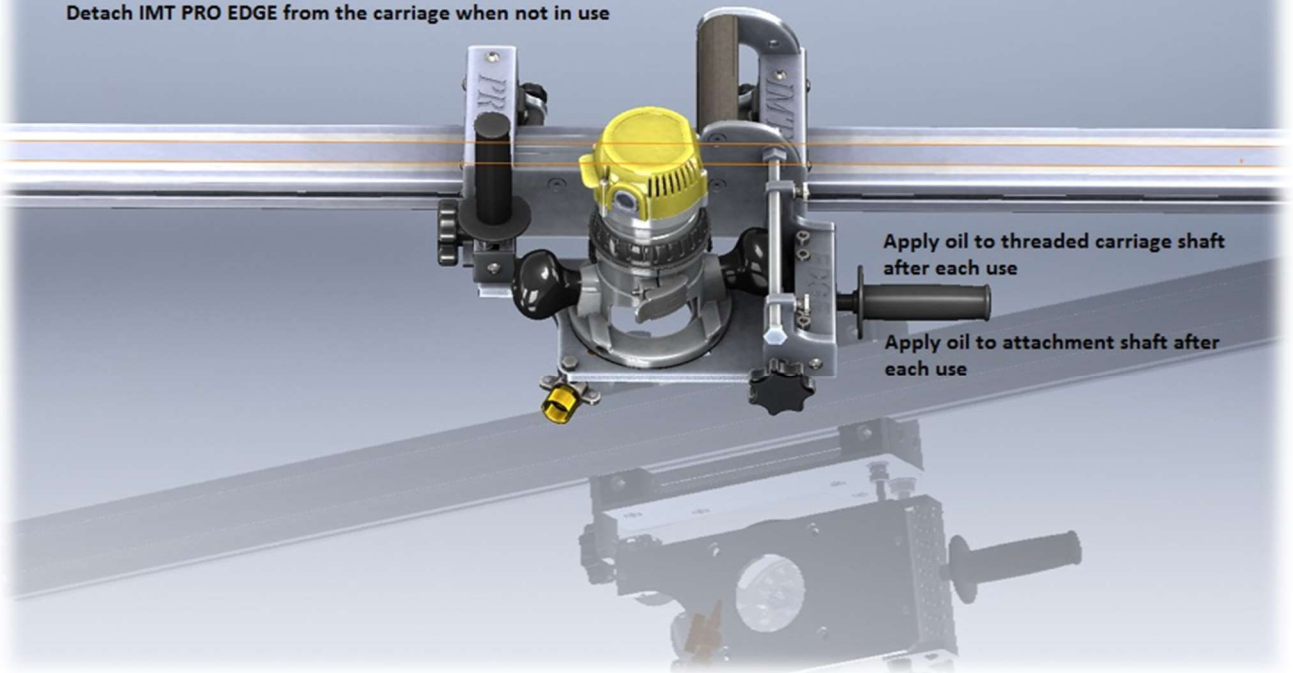

USE WITH GFCI PROTECTED CORD OR OUTLET!